


RG-EST350 V2

5GHz Dual-stream 802.11ac 5KM Wireless Bridge

DATASHEET

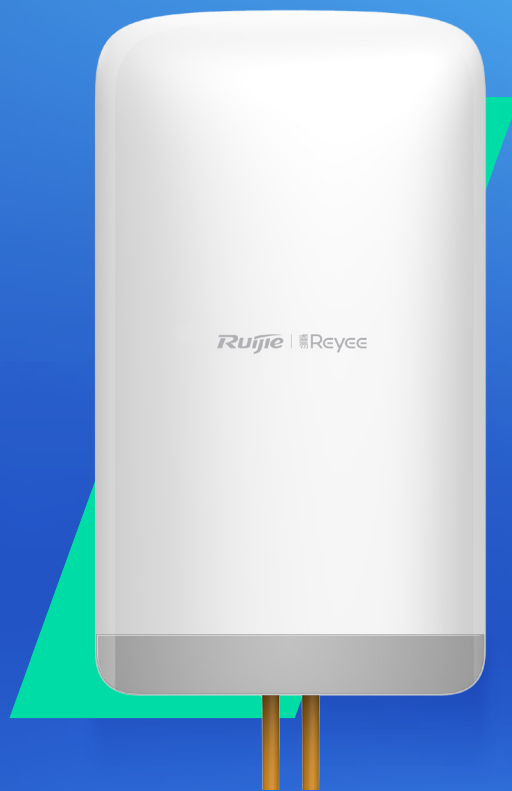

Highlights

- RG-EST350 V2 can easily transmit data from 5KM away in real time
- Automatic pairing at long distance, without complex alignment
- IP54 Weatherproof, -30°C~65°C guarantee stable operating at outdoor environment
- Support maximum 45 x 2MP cameras loading at 3KM, 20 x 2MP cameras loading at 5KM
- Visually Intuitive statistics monitoring on Ruijie cloud, easy maintenance at remotely

Highlight Features

RG-EST350v2

5GHz Dual-stream 802.11ac Next-generation Wireless Bridge




2x2 MIMO 5GHz 2x2 MIMO

2 x GE Ports

Long Range

High-speed wireless data transmission at 5KM range

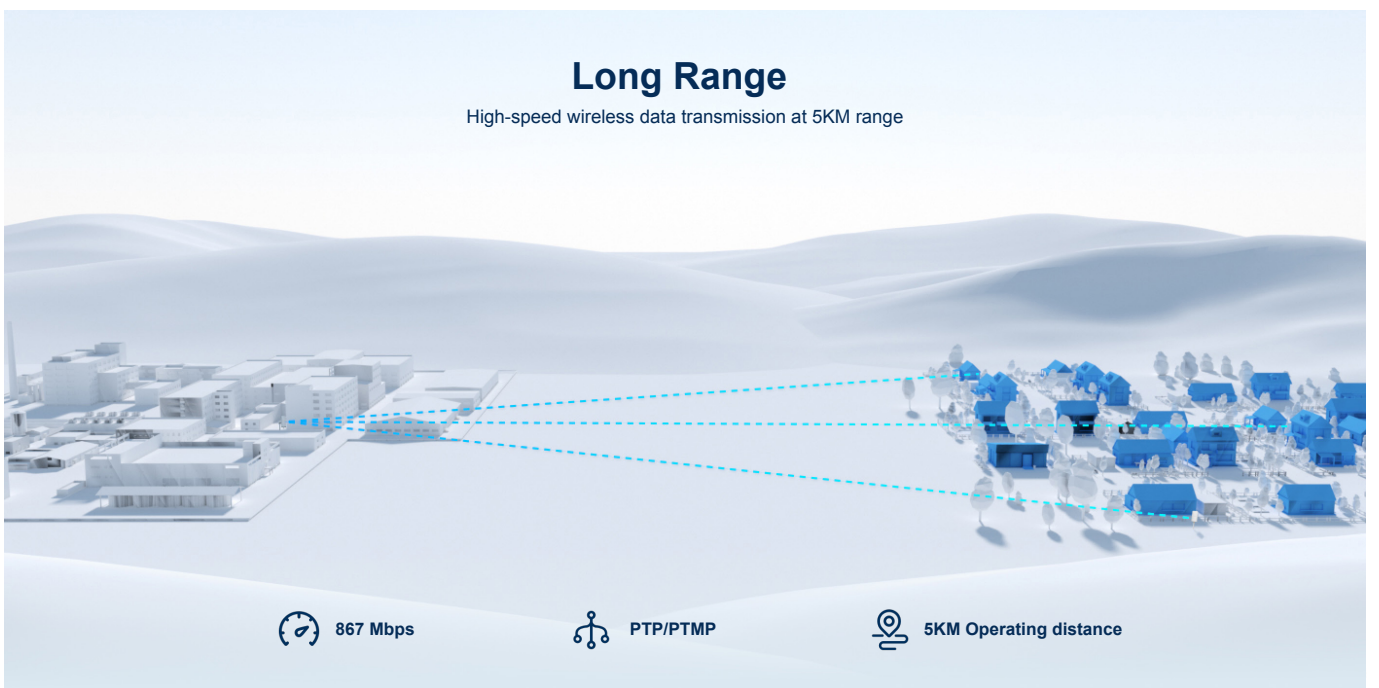

867 Mbps

PTP/PTMP

5KM Operating distance

Highlight Features

High Capacity

45 cameras maximum at 3KM, 20 cameras maximum at 5KM*



3KM

2MP

x 45 Units



5KM

2MP

x 20 Units

*H.265, 2MP Cameras, 3Mbps. To guarantee the transmission quality, the environment should be kept as open as possible to reduce the interference. At the same time, it is recommended to adjust it to the best alignment angle with the signal strength indicator or Ruijie Cloud APP.

Reliable



V0 level
flame retardant



IP54
Weatherproof




-30~65°C operating
temperature

Highlight Features

Convenient


Zero configuration automatic pairing
Plug and Play

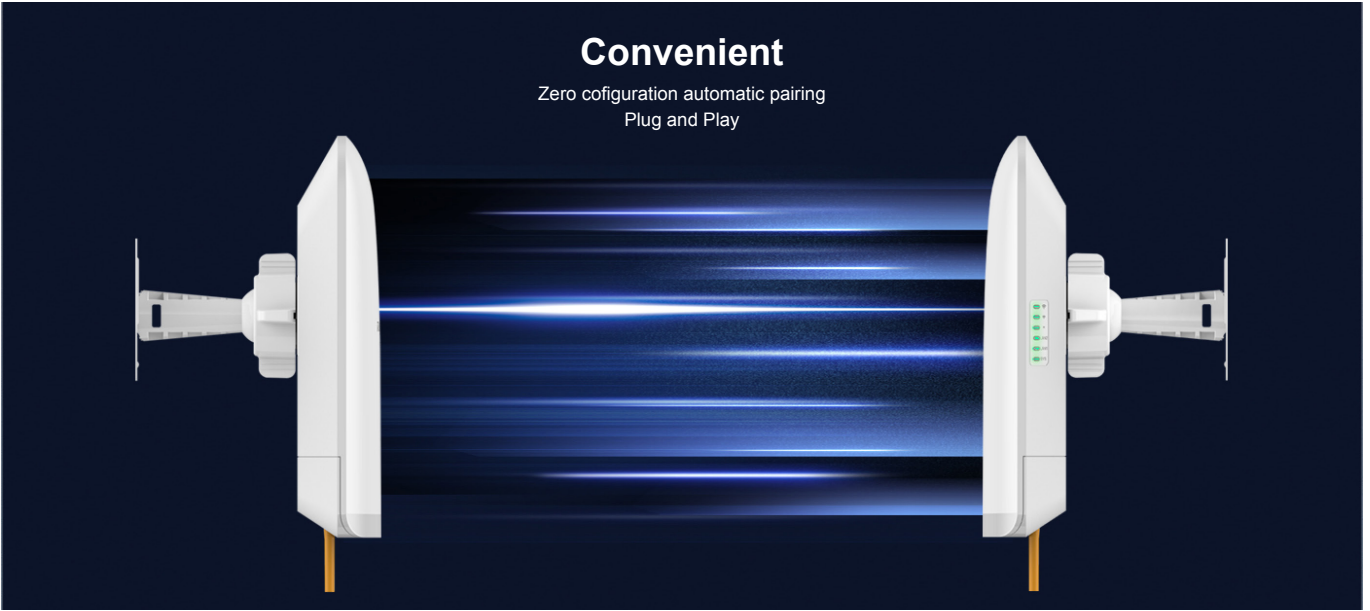

Easy to Install



Cloud, Make Your Business Easy

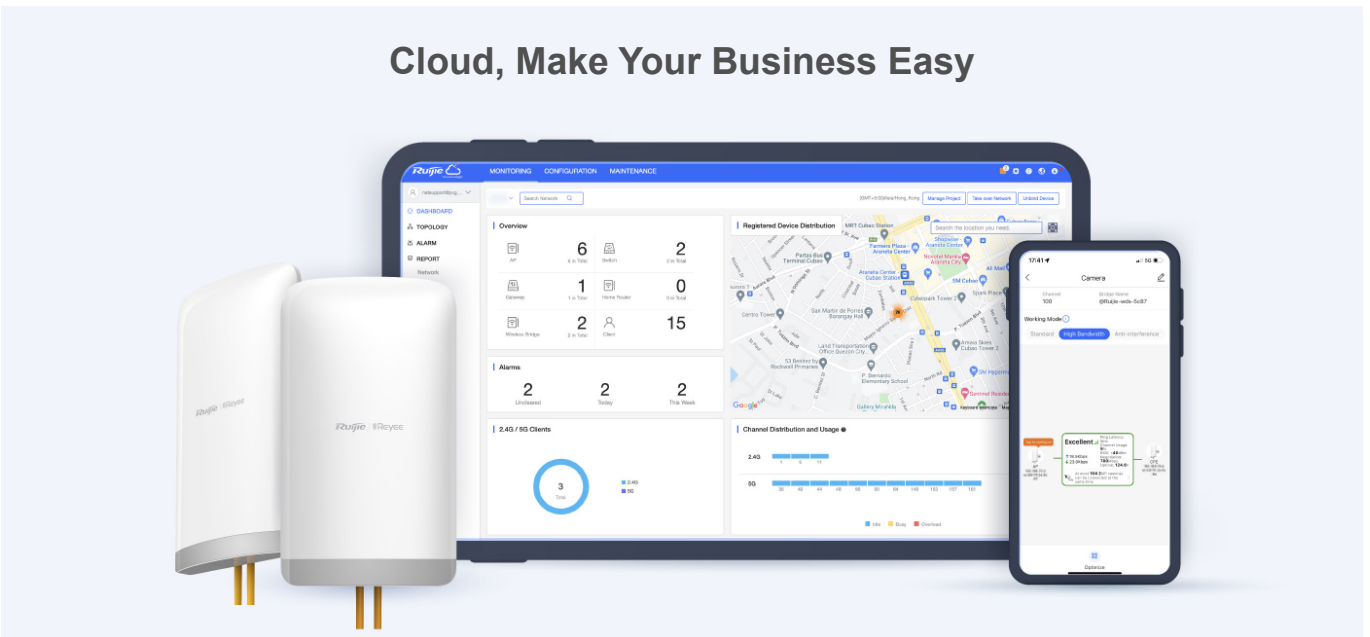

Specifications

Basic

Radio Design	5 GHz Single-Band Dual-Stream
Operating Band	802.11a/n/ac: 5.150~5.350GHz, 5.470~5.725GHz, 5.725~5.850GHz (country specific)
Antenna	Directional antennas, 15 dBi
Polarization	Horizontal: 31°, Vertical: 14°
Bridging Distance	5 KM (recommended)
Spatial Streams	2x2, MU-MIMO
Memory/Flash	128 MB/8 MB
Maximum Throughput	Up to 867 Mbps at 5 GHz
Ports	2 10/100/1000Base-T Ethernet ports, port 1 with Passive PoE
Max. Transmit Power	≤400 mW(26 dBm) (adjustable)
IP Rating	IP54
Lightning Protection	4 KV
Installation	Wall-mounted/ Pole-mounted
Weight	0.5 kg
Dimensions (D x W x H)	230 mm × 132 mm × 48 mm

Software Features

IPv4	
802.1Q VLAN	✓
Multi-VLAN Transparent Transmission	✓
ARP	256
Max. Concurrent Connections	8000
Ping	✓
Traceroute	✓

Specifications

Software Features

IPv4

Unicast traffic	✓
DHCP Client	✓
DNS Client	✓
Static IP address	✓
IP Collision Avoidance	✓

Management IP 192.168.120.1

Routing

Default Route	✓
---------------	---

Wireless

SSID/SSID Hiding	✓
------------------	---

Password Open / WPA-PSK / WPA2-PSK / WPA/WPA2-PSK

RSSI	-58 dBm@1KM -66 dBm@3KM -70 dBm@5KM
------	---

Performance 230 Mbps@1KM(HT40)
200 Mbps@3KM(HT40)
150 Mbps@5KM(HT40)

One-Click Optimization	✓
------------------------	---

DFS	✓
-----	---

Local Forwarding	✓
------------------	---

WLAN QoS WMM

Management

Zero Provisioning on Cloud	QR-Code / Serial Number
----------------------------	-------------------------

CWMP(TR069) Support	✓
---------------------	---

Point-to-Point	✓
----------------	---

Specifications

Software Features

Management

Point-to-Multipoint	Recommended 3
Self-Organizing Network	Max. 200 wireless bridges
AP/CPE Switchover	✓
Interface Configuration	✓
Country Code	176 countries support, details refer to Country&Region Code reference
Clock setting	✓
Time Zone	✓

Maintanance

Alarm	IP address conflict / SSID / Offline
Diagnostics	✓
Reboot	✓
Reset	✓

Cloud Features

Remote Access	✓
Remote Reboot	✓
Statistics Monitoring	✓
Working mode	Normal / High performance / Anti-interference
Remote SSH	✓
Remote EWeb	✓

Camera Reference

3Mbps Video Bit Rate	50 Units/1KM 45 Units/3KM 20 Units/5KM
----------------------	--